



# Vented Eaves Protector

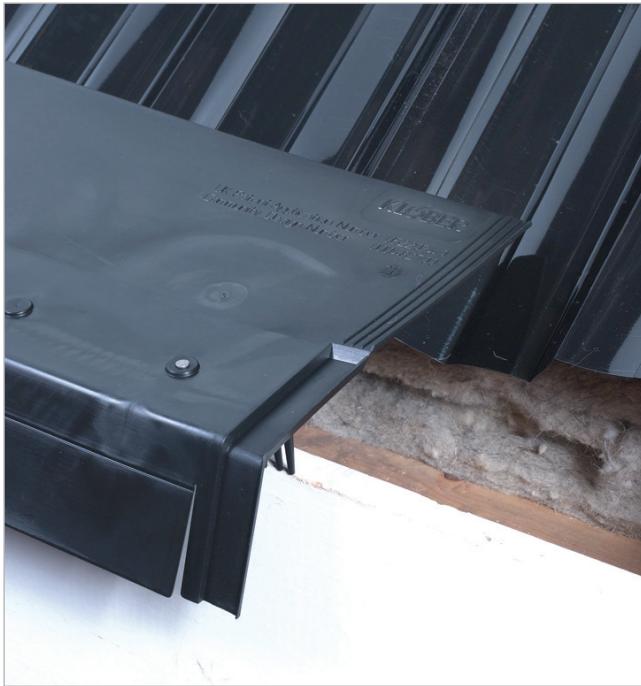

## Installation

Locate the Eaves Protector onto the top of the fascia board, making sure that the stop beads, below the vent, are tight up against the front face of the fascia board. If using slates or roof tiles that do not require the filler comb, fix the unit into the fascia board using corrosion

resistant nails or screws through each hole provided in the Eaves Protector. We recommend that if the Filler Comb is being used that it is fixed after the roof has been battened out prior to the commencement of the tiling. In this case the Eaves Protector would need to be fixed through every other fixing hole provided. The remaining nail holes in the unit are then used to fix the Filler Comb into the fascia board. The Filler Comb is placed with the combs facing outwards onto the locating connectors on the Eaves Protector and fixed through the holes using corrosion resistant nails. Continue this process the whole length of the eaves. The Eaves Protectors are connected together by the overlapping engagement arrangement. RETRO FIT Lift the eaves course of tiles and make good any damage to underlay or rafter feet. Lay the Eaves Protector in place and fix, relay the existing underlay over the Eaves Protector and re-tile.

Klober's Vented Eaves Protector is a faster and easier method of ventilating and protecting at the eaves. It consists of a practical 1000mm Over Fascia Vent with integrated Underlay Support Tray and Eaves Filler Comb. It's also available without the comb.

## Product features & benefits

- Combined Fascia Vent, Underlay Support Tray & Eaves Filler Comb
- Easy to fit
- Practical 1000mm lengths
- Split drip section allows easy fixing of gutter brackets
- Watertight connection assembly
- Prevents ponding behind the fascia board
- UV stable
- 10 year guarantee
- Prevents birds and vermin from entering batten space
- Full replacement fascia boards and capping fascia boards of all sizes
- Engineered nail/screw ports, with 'sleeves' to guide fixings in to the centre of the fascia edge
- Unique 'split skirt' feature which allows 240mm sections to be easily lifted, enabling easy installation of gutter brackets

## Area of application

Suitable for:

- New build and refurbishment work
- Roofs between 15 and 60° pitches
- Flat and profiled tiles

## Material

Black injection moulded UV-stable polypropylene

## Product Codes

10mm without comb      KP3005-0450  
10mm with comb      KP3006-0450

## Dimensions

1000mm x 220mm

## Packaging

40 pieces per carton (without comb)  
20 pieces (with comb)

## Related products

- Roll Out Rafter Trays
- Loft Vent Trays

## Regulations

- Satisfies NHBC requirements
- Complies with BS5250: 2000

## PERFORMANCE / TECHNICAL DATA

Provides ventilation of 10,000mm<sup>2</sup>/per metre run.

TS-05#17-UK-0314. We assume no liability for typing errors.

### Klober Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA  
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · www.klober.co.uk · info@klober.co.uk

# KLOBER