


Tacto® double-sided tape

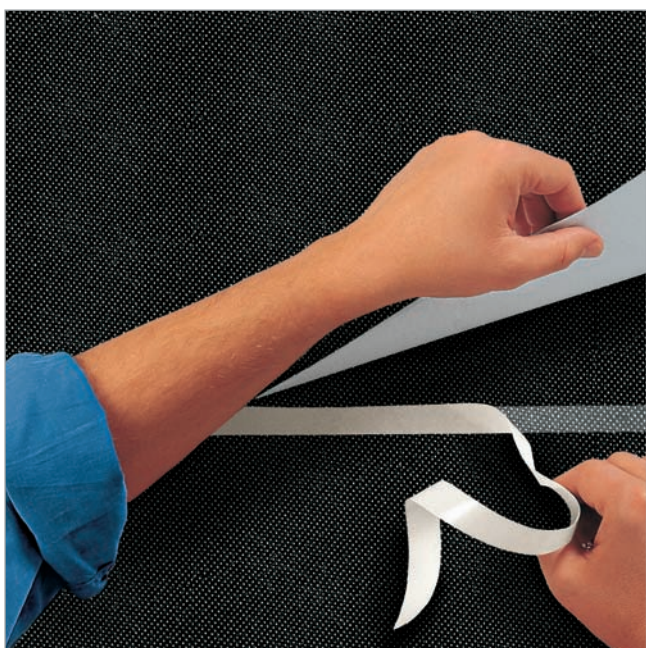

Related products

- Any Klober underlay
- Wallint® 50 or Wallint® solar vapour control layers/air barriers

Tacto® can be used to adhere underlays & vapour control layers/air barriers to both smooth and irregular surfaces as well as sealing laps in the underlay/vcl. By creating an airtight seal it will help reduce energy loss through the roof.

Product features & benefits

- Double-sided
- Fibre-reinforced tape with high-tack acrylic adhesive
- Creates air and wind-tight seals
- Highly resistant to changes in temperature & weather
- Highly durable

Area of application

Suitable for:

- Sealing laps between underlays or vapour control layers/air barriers
- Adhering underlays & vcls/air barriers to both smooth and irregular surfaces, eg plasterboard, roof lights & roof vents
- Timber frame: planed/finished or stained
- Absorbent materials: gypsum fibreboard
- Synthetic materials: paper, fleece or similar, PE, PP or hard PVC
- Other surfaces: metal, glass, PUR-foam/styrofoam
- Use both internally & externally
- Roof pitches from 16°

Material

Acrylic adhesive with PE release paper

Colour

Transparent

Dimensions / Packaging

50m x 20mm wide / 10 rolls per carton / 750 rolls per pallet

Weight (per carton)

4.8kg

Product code

KU 0111

TECHNICAL DATA

Adhesive	Acrylic
Solvent	none
Installation temperature	>5°C
Temperature stability	-40°C to +80°C
UV resistance	4 months
Resistance to ageing	Acrylic adhesive does not dry out or become brittle. It remains permanently elastic & adhesive.
Shelf life	12 months at 30°C or less

TS-09#15-UK-0114. We assume no liability for typing errors.

Klober Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · info@klober.co.uk · www.klober.co.uk

KLOBER