


Permo® Universal Connection Roll

Universal connection solution between insulation panels 'sarking'

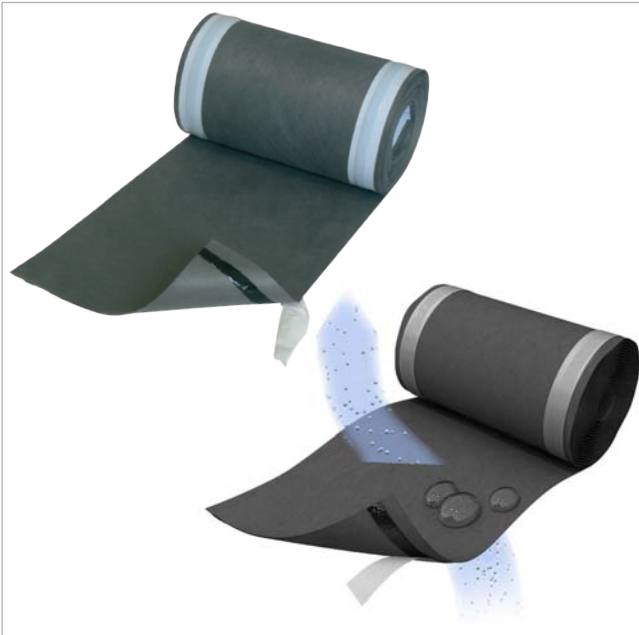

A vapour permeable, weatherproof connection at the ridge, hip, valley or at the chimney area of the roof. Part of the Thermo-Line product range, used in conjunction with Permo® therm.

Product features & benefits

- Permeability promotes drying of the roof construction
- Simple and quick to install
- Butylon strips ensures strong adhesion

Area of application

The Permo® universal connection roll is suitable for Permo® therm insulation on rafters level ridge of the hip to the valley or the chimney areas. The level of the valley, the connection must be glued to the butyl using waterproof adhesive mastic Klobber Pasto®.

Material

3 layers spunbond fleece with integrated 2 Butylon strips

Product Code/Weight/Dimensions

Permo® Universal Connection Roll

KD 9050 / approx. 145g/m² / 0.3 width x 15m length

Packaging

4 rolls of 15m

Related products

- Permo® therm insulation panel
- Permo® TR plus
- Mastic glue waterproof Klobber Pasto®



TECHNICAL DATA

Resistance to water penetration, NBN EN 1928	W1
Resistance to the penetration of air	< 0.1 m ³ /m ² h 50 Pa
Transmission of water vapor sd, NBN EN 12572	approx. 0.03m
longitudinal / transverse tensile strength EN 12311-1 NBN	275 N/5cm 230 N/5cm
Tear resistance to longitudinal / transverse nail, NBN EN 12310-1	170 N 185 N
Temperature resistance	-40°C / +80°C
Impermeability (Test the water column), NBN EN 20811	> 3500mm
UV stability	4 months



Klobber Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · www.klobber.co.uk · info@klobber.co.uk

KLOBBER