
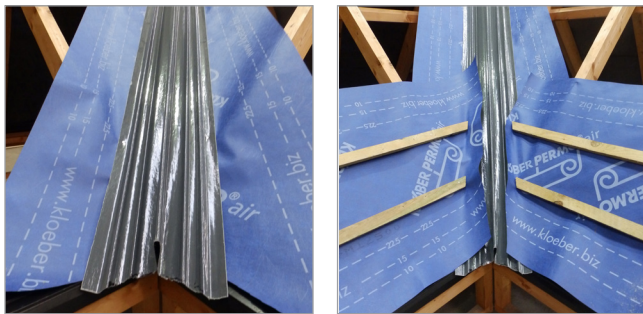


# Under Batten GRP Dry Valley

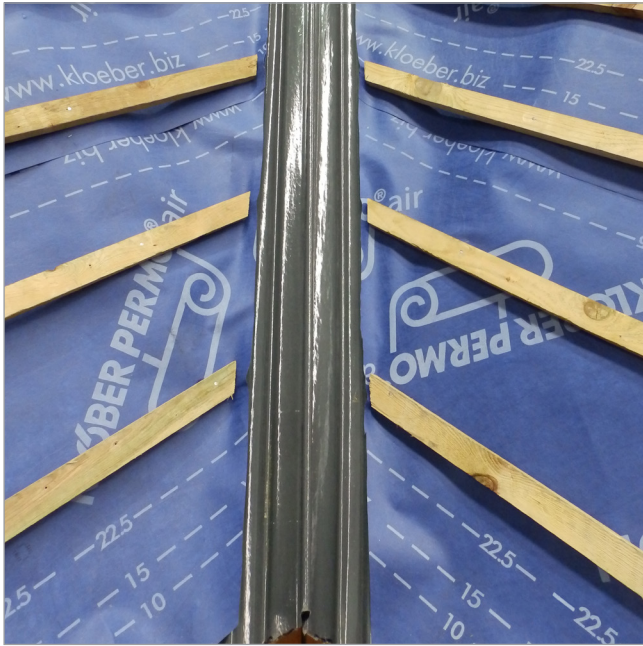

The Under Batten GRP Dry Valley provides a robust, durable and lightweight alternative to lead and zinc valleys.

## Product features & benefits

- Cost effective alternative to lead
- Lightweight, flexible, safe and easy to cut
- UV resistant

## Area of application

Suitable for:

- 20° maximum pitch variance
- 17.5° minimum rafter pitch
- 60° maximum rafter pitch

## Material

Grey UV stabilised Glass Reinforced Polyester

## Dimensions

80mm upstand x 3 m Long x 360mm x 1.1mm  
105mm upstand x 3 m Long x 360mm x 1.1mm

## Product Codes

Under Batten GRP Dry Valley **80mm** KR966080  
- Suitable for Slate, Flat & Plain Tiles

Under Batten GRP Dry Valley **105mm** KR966105  
- Suitable for Profile Tiles

## Packaging

Banded in packs of 10 pcs

## Regulations

- Fire tested to comply with BS476: Part 3 SAB and Part 7 Class 3

## Performance

Allow 150mm overlap for rafter pitches 40° – 60°.

Allow 200mm overlap for rafter pitches 22.5° – 39.5°.

Allow 250mm overlap for rafter pitches 17.5° – 22°.

## Installation

Klober Dry valley troughs are suitable for roof pitches up to 60°.

We recommend installing noggin supports between the rafters in line with where the outer edge of the valleys board are to be fixed.

- Install 6mm plyboard valley support. Either between the rafters or on top to comply with BS5534 and fix to the rafters/noggins.
- Fit support trays and a layer of roofing membrane down the valleys ensuring that the membrane is not exposed at the eaves.
- Lay the valley centrally on the valley boards pinching the central upstand together before fixing with nails every 500mm with the valley overlapping the fascia by 50mm to discharge water into the gutter.
- Install the roofing membrane over lapping the dry valley, mitre cut the battens to the outer water bar of the valley and fix them to rafters/noggins.
- Trim the membrane between the two outer water bars and then slate or tile as normal.

Full fitting instructions available on our website.

## Klober Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA  
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · [www.klober.co.uk](http://www.klober.co.uk) · [info@klober.co.uk](mailto:info@klober.co.uk)

Liability: All descriptions of the goods in brochures, sales materials and the like (which shall not form part of the contract) are merely indicative of the nature of the goods. We reserve the right to alter the appearance or functionality of the materials or components of the goods provided always they do not differ from any expressly agreed specification. Any advice or suggestions made by us or on our behalf whether in brochures, technical literature or in response to a specific query as to the usability or suitability of the goods for a specific purpose is given in good faith on a goodwill basis only and on the basis of any information supplied by you. However, it remains your ultimate responsibility to ensure (by trial use or processing if necessary) that the goods will be suitable in all respects. (For a full copy of Klober Ltd Terms and Conditions, please contact the Sales Office.)

# KLOBER