



EasyForm Plus is a very strong, reinforced universal flashing solution for pitched roofing.


EasyForm Plus is a very strong and robust universal flashing that combines flexibility and rigidity in a perfect way. Reinforced with an aluminium grid it is almost as rigid as lead, but still moulds easily to the contours of the roof. The butyl underside makes it highly durable and means it does not suffer from wind uplift.

Colour-coated and creped aluminium composite

Aluminium grid

Butylon backing

Release paper -
divided in two or three strips

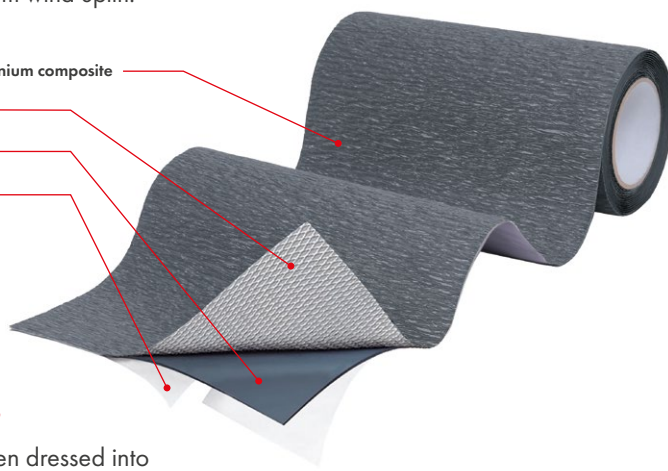

Features and benefits

- Stretches up to 30% when dressed into the pan of the tile, ensuring easy application for a wide range of details.
- Reinforced with a metal grid for extra strength.
- Less expensive than lead with no scrap value, reducing the risk of theft.
- No welding or specialist tools required.
- Perfect match of flexibility and rigidity.

Area of application

- Step or cover flashing at wall or chimney abutments.
- Top edge abutment detail.
- Saddle detail.
- Suitable for both new build and refurbishment.

Related products

- Flashing Glue PACCGL.
- Flashing sealant PACCSE.
- Flashing Roller PACCRO.

Approvals and certifications

- All products supplied by Klover Ltd are covered by a 10 year guarantee against manufacturing defect.

Colours



Anthracite

Zinc Grey

Red

Technical guidance

Material	Coated aluminium with aluminium grid and self adhesive butyl backing.
Roof pitch	Minimum 10°
Installation temperature	+5° to +40°C
Temperature resistance	-20° to +80°C
Thickness	1.7mm
UV Stability	UV stable due to metallic upper surface.
Butyl adhesive	Should be applied to suitable surfaces only, which are dry and dust free. Not suitable for use with bituminous roof coverings.
Resistance	Does not rot and is weather resistant. Also resistant to frost, ageing and changes in temperature.
Water column	Watertight.
Sealant	Flashing Sealant PACCSE should be used for brickwork joints. Under no circumstances should silicone based sealants or adhesives be used.

Product information

Product code	Width mm	Length m	Weight kg	Colour	Box quantity	Pallet quantity
KW4300-05-1-0469	300	5	2.25	Anthracite	5	120
KW4300-05-1-0470				Zinc Grey		
KW4300-05-1-0154				Red		
KW4450-05-1-0469	450		3.37	Anthracite	2	80
KW4450-05-1-0470				Zinc Grey		

Klover is certified to ISO 9001:2015 for Quality Management and ISO 14001:2015 for Environmental Management. All Klover products comply fully with all relevant Building Regulations and British Standards.