




## Secondary line of defence against wind driven rain at wall abutments.

A high performance GRP continuous abutment soaker or secret gutter typically used with flat interlocking tiles, which provides a secondary line of defence against wind driven rain at wall abutments.

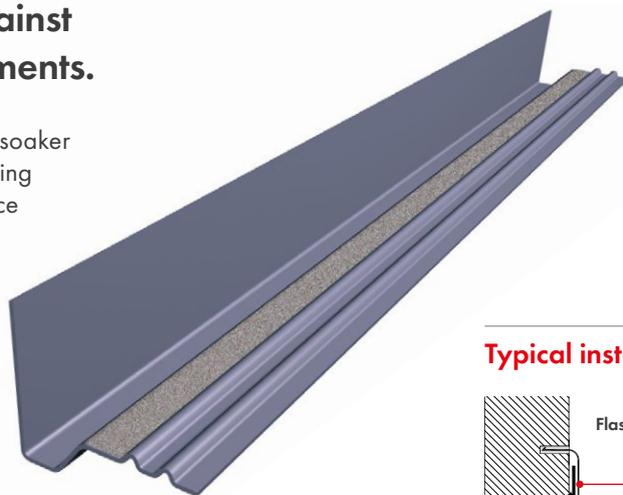

### Features and benefits

- Durable and lightweight to handle for quick and easy installation.
- Anti-capillary ribs provide extra watertightness.
- A cost effective alternative to lead.
- Sanded strip for mortar bedding.

### Area of application

- Side abutment detail.
- Interlocking tiles.

### Related products

- Wakaflex Lead Free Flashing to form step/cover flashing.


### Approvals and certifications

- All products supplied by Klobber Ltd are covered by a 10 year guarantee against manufacturing defect.
- Fire tested to comply with BS 476: Part 3: 2004

### Installation Guide

- Lay membrane and allow for 100mm turn up at abutment wall and ensure a 50mm gap between wall and counter batten.
- If the end rafter is less than 50mm from the abutment wall a support batten needs to be fixed to the end rafter to support the batten ends and counter batten.
- Starting at eaves lay and fix secret gutter into roofing battens with 25mm clout headed nails through pre drilled holes at max 500mm centres. For longer runs allow for a 150mm overlap measured vertically.
- Trimming of the fascia board may be required to allow water to be discharged into the gutter. Alternatively, a tilt fillet and lead gutter outlet can be incorporated.
- Tiles should be laid as normal finishing close to the wall (max 15mm) and bedded in mortar onto the sanded strip. It may be necessary to remove the nib from the back of the tile.
- Wakaflex stepped cover flashing should then cover the tiles (min 150mm) and secret gutter upstand.

### Typical installation

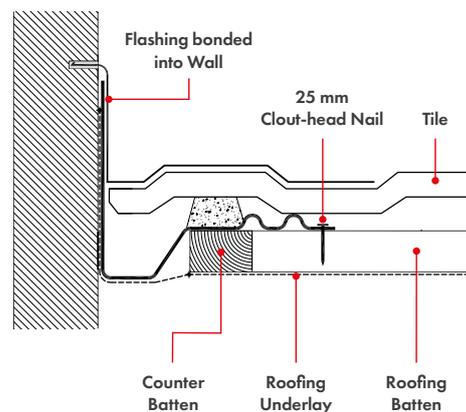

### Technical guidance

Material	UV stabilised Glass Reinforced Polyester
Colour	Grey
Thickness	1mm
UV Stability	UV Stable
Minimum headlap	150mm (measured vertically)

### Product information

GRP Secret Gutter						
Product code	Width mm	Length mm	Height mm	Colour	Pack Quantity	Weight per pack
KR972010	140	3000	120	Grey	10	20kg

Klobber is certified to ISO 9001:2015 for Quality Management and ISO 14001:2015 for Environmental Management. All Klobber products comply fully with all relevant Building Regulations and British Standards.