



# Underlay Support Tray

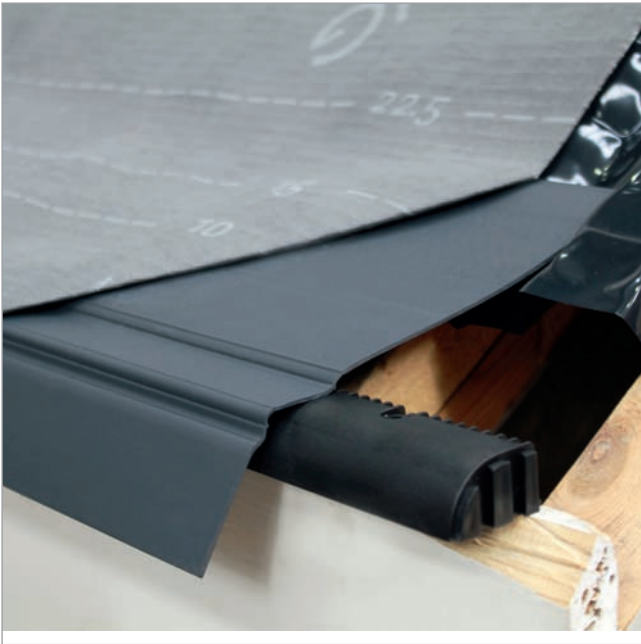

## Installation

The Underlay Support Trays are placed over the fascia board and directly nailed into the rafters using corrosion resistant nails. Adjoining lengths are overlapped by a minimum of 100mm. The roofing underlay is then laid onto the Underlay Support Tray ensuring the bottom edge does not go over the line of the fascia board and into the gutters. Fascia vents need to be fitted directly to the top of the fascia board prior to the Underlay Support Tray being fitted.

A simple and effective product to prevent the exposure of the roofing underlay at the eaves, which leads to long-term degradation of the underlay. The Underlay Support Tray, due to its rigid nature, prevent ponding behind the back of the fascia board.

## Product features & benefits

- Provides clear drainage point into gutter, directing water away from the underlay
- Protects the roofing underlay from UV degradation
- Highly recommended when existing fascia boards are being replaced
- Easy to install and economic replacement for rotting underlay at eaves
- Prevents ponding behind the fascia and the underlay sagging between rafters

## Area of application

Suitable for:

- New build and re-roofing applications

## Material

PVC

## Colour

Black

## Dimensions

1.5m long x 190mm wide with 55mm overhang

## Weight

24kg per pack

## Packaging (per pack)

Without flexi hinge 20 x 1.5m lengths

## Product codes

Without flexi hinge KP973910

## Related products

- Fascia Vents
- Roll Out Rafter Trays

TS-05#16-UK-0314. We assume no liability for typing errors.

## Klober Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA  
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · info@klober.co.uk · www.klober.co.uk

# KLOBER