



Pipe and Cable Sealing Collars

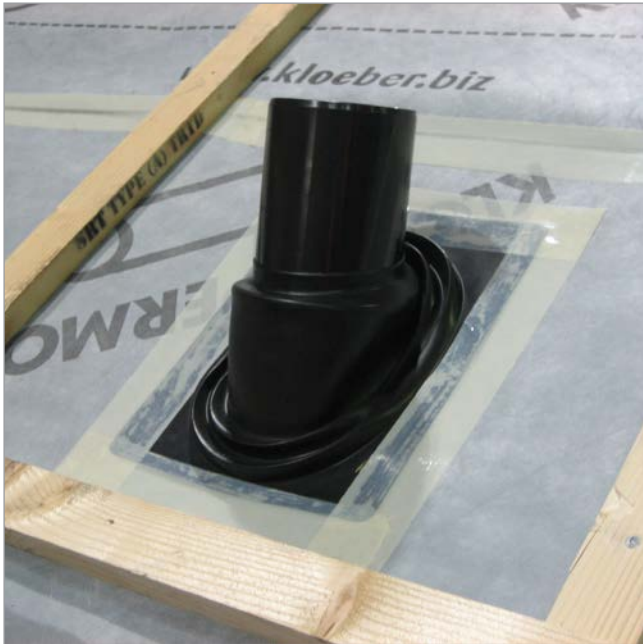

Installation Pipe Sealing Collar

1. Cut hole in underlay/vapour control layer according to diameter of pipe
2. Place sealing collar in position
3. Tape the bottom edge of the flange to the underlay/vcl using Klober tape
4. Tape both sides of flange, overlapping them with tape along the bottom edge
5. Tape top edge so that it overlaps both side tapes
6. Push pipe through collar into place

Installation Sealing Collar

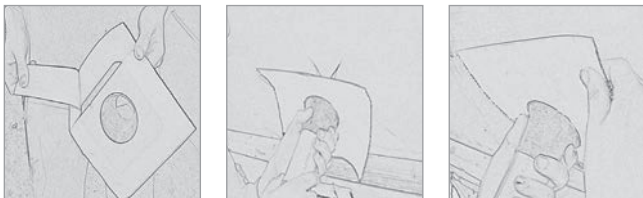

1. Peel off the protective backing paper section shown in diagram 1
2. Place the collar over the pipe
3. Press and stick on to the material
4. Peel back the second section of the backing paper and apply
5. To ensure good adhesion, press firmly all around

Klober's Pipe and Cable Sealing Collars are the ideal solutions for creating airtight and windtight seals around pipes and cables which pass through the roof.

Product features & benefits

- For use both inside and outside
- Easy to install

Pipe sealing collar:

- Use with Klober sealing tape to create wind and airtight seals between the underlay/VCL for pipes which penetrate the roof
- Suitable for areas with adverse weather conditions. High quality EPDM collar is highly durable for use inside where heat builds up and outside in very cold conditions
- UV stable
- Flexible material allows pipes from 100mm to 125mm diameter + to pass through the roof
- Suits nearly all roof pitches due to the highly flexible ridges in the collar
- Suitable for both rigid & flexipipes

Sealing collar:

- Available in various diameter for different size cables - 8-12mm, 15-22mm, 25-32mm, 42-55mm & 50-70mm
- Creates airtight seal around cables passing through the roof

Area of application

Pipe sealing collar suitable for:

- Roof pitches between 10 - 70°
- Inside & outside
- Cable Sealing collar perfect for solution for cables from Antennae, Neon signs, Satellite dish, Air-conditioning, PV Solar panels, etc.
- Sealing to any underlay/vapour control layer

Material

Pipe sealing collar: EPDM

Sealing collar: with silicon release paper & EPDM Collar

Dimensions

Pipe sealing collar: 310mm long x 235mm wide x 11.5mm high
Inside diameter: 95mm

Sealing Collar: 228 x 228 x 60mm

Packaging

Pipe sealing collar: 20 pieces per carton / 48 cartons per pallet

Sealing Collars: 2 per carton, 126 per pallet

Product codes:

Pipe sealing collar: KU 8001

Sealing Collars: 8-12mm KE8092 42-55mm KE8090
15-22mm KE8093 50-70mm KE8091
25-32mm KE8094

Related products

- Permo® underlays
- Wallint® air barriers & vapour control layers
- Adhesive tapes
- Flexipipes
- Solar PV Cable Outlet

Klober Ltd

Unit 6F · East Midlands Distribution Centre · Short Lane · Castle Donington · Derbyshire · DE74 2HA
Tel. +44 (0)1332 813 050 · Fax +44 (0)1332 814 033 · info@klober.co.uk · www.klober.co.uk

KLOBER